

Electric lighting range

TUNBRIDGE

WILLIAM SUGG
ESTD & CO. LTD 1837

The Tunbridge decorative pendant luminaire is a variation on our historic 'Rochester' luminaire. It is a simple, classy and diverse amenity light fitting that has no upward light and excellent uniformity. Manufactured from a combination of aluminium spinnings, the Tunbridge is suitable for both conventional and contemporary applications and is IP65 rated.

The Tunbridge is fitted with clear polycarbonate glazing as standard and is ideal for decorative and amenity lighting settings. This fitting is widely used and (with a variety of pendant brackets) can offer a performance solution as the unobstructed glazing improves the light output and lighting distribution.


Features

- Available in one size – **28"** (680mm). *Please note all dimensions are approximate and subject to minor change.*
- **Light sources:** High performance (LED COB, LED panels, LED mantles). Conventional lamps with a range of optical distributions to meet varied applications are also available.
- **Lantern construction:**
 - The Tunbridge is designed to be a pendant luminaire, with an easy fit coupling to ease installation and ensure the correct orientation, to the road, is achieved without cable twist.
 - IP65 rated.
- **Glazing:**
 - Fitted with clear polycarbonate glazing, sealed by compression.
 - Glazing is released by three stainless steel, over centre, catches that hinge down to gain access to the gear compartment.
- **Control gear:** The gear is housed in the main luminaire body on a gear tray.
- **Finish options:** Supplied in black RAL 9005 as standard. Durable and long-lasting polyester powder paint finishes in a full range of RAL colours. Specialist finishes, including marine grade, are available on request.
- Dark skies compliant.
- Emergency versions available.
- Single and two-part electronic photocells are available upon request.

Mounting options

- The lantern can be suspended on an EasyFit or threaded coupling, such as a BSP.
- It can also be adapted for side entry.

Further technical information available on request.

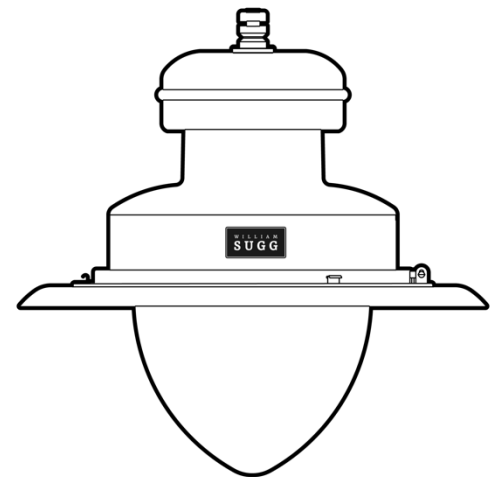


INGRESS PROTECTION	IP54	X
	IP65	✓
GLAZING	Glass	X
	PC	✓
LIGHT SOURCE	LED	✓
	Discharge	✓
	Emergency	✓
FINISH OPTIONS	RAL colour range	✓
	Natural copper	X
	Polished copper	X
	Lacquered	✓
	Other	✓



Follow us @WSuggLighting
#WilliamSuggLighting

23 Blatchford Close, Horsham, T: +44 (0)1293 540111
West Sussex RH13 5RG F: +44 (0)1293 540114

E: enquiries@williamsugg.co.uk
williamsugg.co.uk

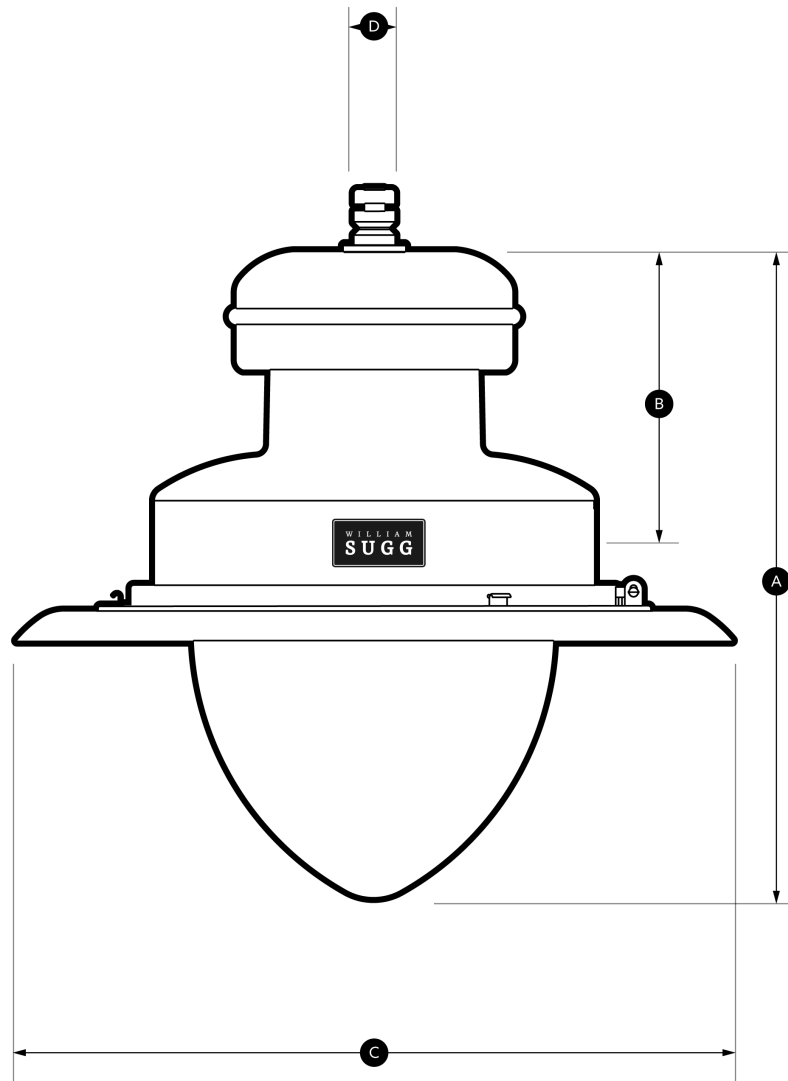

DIMENSIONS	TUNBRIDGE
A. LANTERN HEIGHT	680mm
B. LAMP HEIGHT	360mm
C. DIAMETER/WIDTH	590mm
D. STANDARD ENTRY	EasyFit - 39mm
WINDAGE AREA	0.16m ²
WEIGHT (APPROXIMATE)	11kg

