

UPRIGHT ROCHESTER

The Upright Rochester is a traditional heritage post top lantern which has clear glazing. The lantern is handcrafted in aluminium with a highly decorative upright bracketry which connects the lantern to the control box.

The Upright Rochester is manufactured from a collection of castings and spinings that come together to make this unique post top combination. The lantern is widely used throughout Covent Garden and the theatre District in London and in the Central District in Hong Kong.


Features

- Available in one size – (see dimensions table). *Please note all dimensions are approximate and subject to minor change.*
- **Controls:** The permanent pilot and solenoid are mounted in the cast aluminium body of the lantern. If mains power is not present the optional battery powered Sugg Opto Clock offers timed control from a remote box fitted in the column base. A remote photocell operation is also available. Both control options are available for the Upright Rochester for natural and LPG gases.
- **Burner options:**
 - **Fishtail burner:** The fishtail burner is a flat flame that is produced from a ceramic jet that ensures the flame is stable while providing the visual 'fishtail' shape. This is sometimes referred to as a 'batwing' burner and is preferred when the flame shape and appearance is of more importance than the light output.
 - **Superheated burner:** The inverted gas mantles are suspended from a variety of cast superheaters offering different outputs depending upon the number of mantles selected.
- **Lantern construction:**
 - IP54 rated.
 - Drop down brim and glazing to access for maintenance.
- **Glazing:** Glass glazing, sealed by compression by the hinged brim and over centre latches. Various finishes available including, etched and glass by special request.
- **Finish options:** Durable and long-lasting polyester powder paint finishes in a full range of RAL colours. The lantern is finished in black RAL 9005 as standard. Specialist finishes, including marine grade, are available on request.
- Dark skies compliant.

Mounting options

- **Cast base:** A solid, aluminium casting, powder coated and with an entry suitable for a column or bracket with a 76mm spigot.

Further technical information available on request.

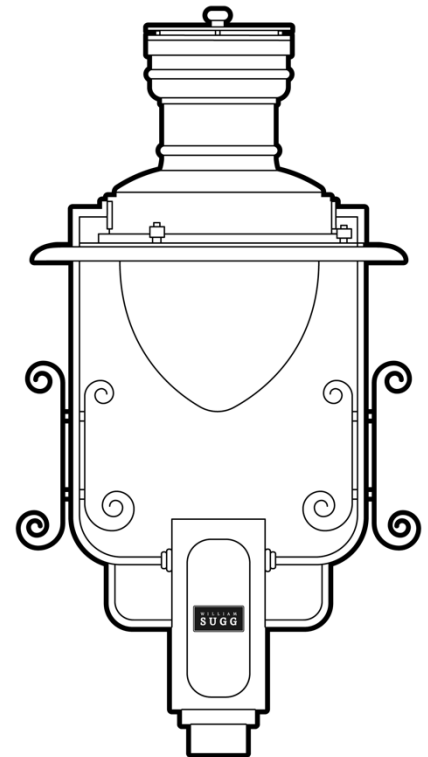

INGRESS PROTECTION	IP54	✓
	IP65	X
GLAZING	Glass	✓
	PC	X
FINISH OPTIONS	RAL colour range	✓
	Natural copper	X
	Polished copper	X
	Lacquered	✓
	Other	✓




Gas lighting range

UPRIGHT ROCHESTER

WILLIAM SUGG

ESTD & CO. LTD 1837

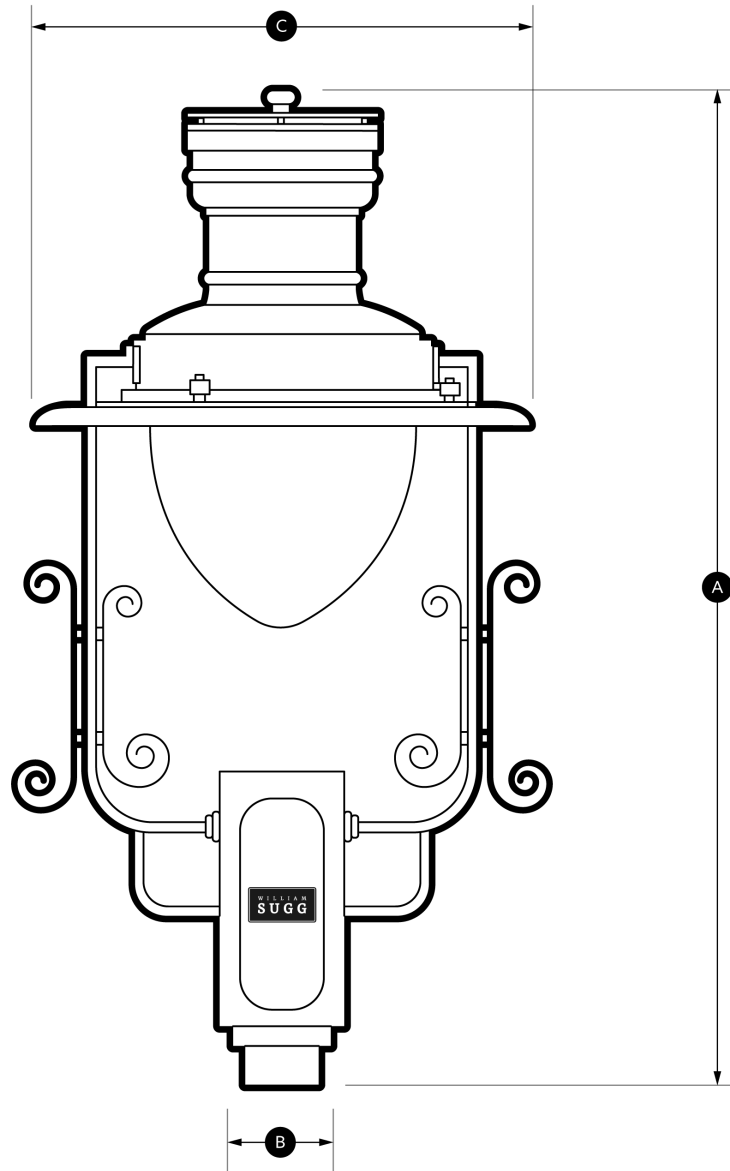

DIMENSIONS	UPRIGHT ROCHESTER
A. LANTERN HEIGHT	1350mm
B. STANDARD ENTRY	76mm
C. DIAMETER/WIDTH	590mm
WINDAGE AREA	0.16m ²
WEIGHT (APPROXIMATE)	11kg